

SILVA

Wood-Clad Windows & Doors

ALUMINUM OUTSIDE • HARDWOOD INSIDE

WHY THE NAME

Beyond the Glass.

Anyone can sell you glass. What keeps a home quiet, dry and sealed in year fifteen is everything beyond it — the frame, the drainage, the hardware, the seals, and the hands that installed it.

We named the company for the part you don't see, because that is the part that decides.

SILVA • MERIDIAN • LINEA • MOTUS • ATRIUM

Inside

04	How Silva is built	Corner joinery · finishing
06	The wood	Species, chosen for use
07	Tilt & turn windows	Silva 70 · 75 · 80 · 85 · 90 · 95
13	Casement windows	Silva 75 · 95
15	Sliding windows	Silva 115 · 165
17	Swing doors	Silva 75 · 85 · 135
20	Sliding & folding doors	Silva 90 · 155 · 220
23	The assessment	How a system gets specified
24	The range	Every system, one table

Specifications are the systems as supplied and are confirmed at assessment. Model names are series + profile depth in millimeters, rounded to the nearest five; the exact measured depth is printed on each page. No price appears in this book.

HOW SILVA IS BUILT

Weather outside. Wood inside.

An aluminum exterior engineered for rain, heat and salt air; a solid hardwood interior a room wants to touch. The corner of the frame is where that promise is kept.

TENON CORNERS

45° hidden solid-wood tenon, dovetail-locked — corners cannot split.

LOCKED BOTH WAYS

Dovetail plus concealed fastener hold seasonal movement.

SEAMLESS SHELL

Corner-welded, cavity-filled, whole-sprayed aluminum outside.

NON-RETURN DRAINAGE

Water leaves through a path that cannot flow back.



THE FINISH

Three coats under. Two coats over.

Waterborne paint that keeps the grain readable — over timber stabilized by microwave-balanced drying, so the wood arrives already done moving. The aluminum shell takes powder coat as standard, with a fluorocarbon coastal option for salt air.

AS SUPPLIED — INTERIOR 18 MM SOLID HARDWOOD, AMERICAN OAK STANDARD · EXTERIOR ALUMINUM, POWDER-COATED · NAMED EUROPEAN HARDWARE PER SYSTEM



Species, chosen for use.

Density, resin and grain decide where each belongs. Physical samples decide the final call — no color is promised from a printed page.

American oak

STANDARD

Strong open grain, ages honestly.

Burmese teak

OPTION

The marine-grade classic.

Indonesian merbau

OPTION

Grew in a climate like ours.

African padauk

OPTION

Deep color, rosewood-hard.

Chinese chestnut

OPTION

The paler, straight-grained pick.

Delonix & more

ON REQUEST

Specified at assessment.



SILVA · TILT & TURN WINDOW

Silva-70

70 MM · DEPTH

The entry to the wood-clad range. Tilted, it ventilates while locked; turned, it opens fully inward — with an oak interior where a handle actually meets a hand.



SOLID OAK
INTERIOR
STANDARD · AS
SUPPLIED

DEPTH OF PROFILE
70 mm

ALUMINUM WALL
≥ 1.4 mm

WOOD INTERIOR
**18 mm hardwood · oak
std**

WOOD OPTIONS
**Chestnut / merbau / teak
/ padauk**

GLAZING
5 + 20Ar + 5

GLASS RABBET
41.5 / 38 mm

SCREEN
**Optional, semi-
concealed**

FINISHES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · CURRENT SPECIES AND FINISH COLORS ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



SILVA · TILT & TURN WINDOW

Silva-75

75 MM · DEPTH

The compact tilt & turn — a 75 mm section for standard openings, argon-glazed like everything in this book.



SOLID OAK
INTERIOR
STANDARD · AS
SUPPLIED

DEPTH OF PROFILE
75 mm

ALUMINUM WALL
≥ 1.4 mm


WOOD INTERIOR
18 mm hardwood · oak
std

WOOD OPTIONS
Chestnut / merbau / teak
/ padauk

GLAZING
5 + 12Ar + 5

GLASS RABBET
32 / 30 mm

FINISHES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · CURRENT SPECIES AND FINISH COLORS ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT

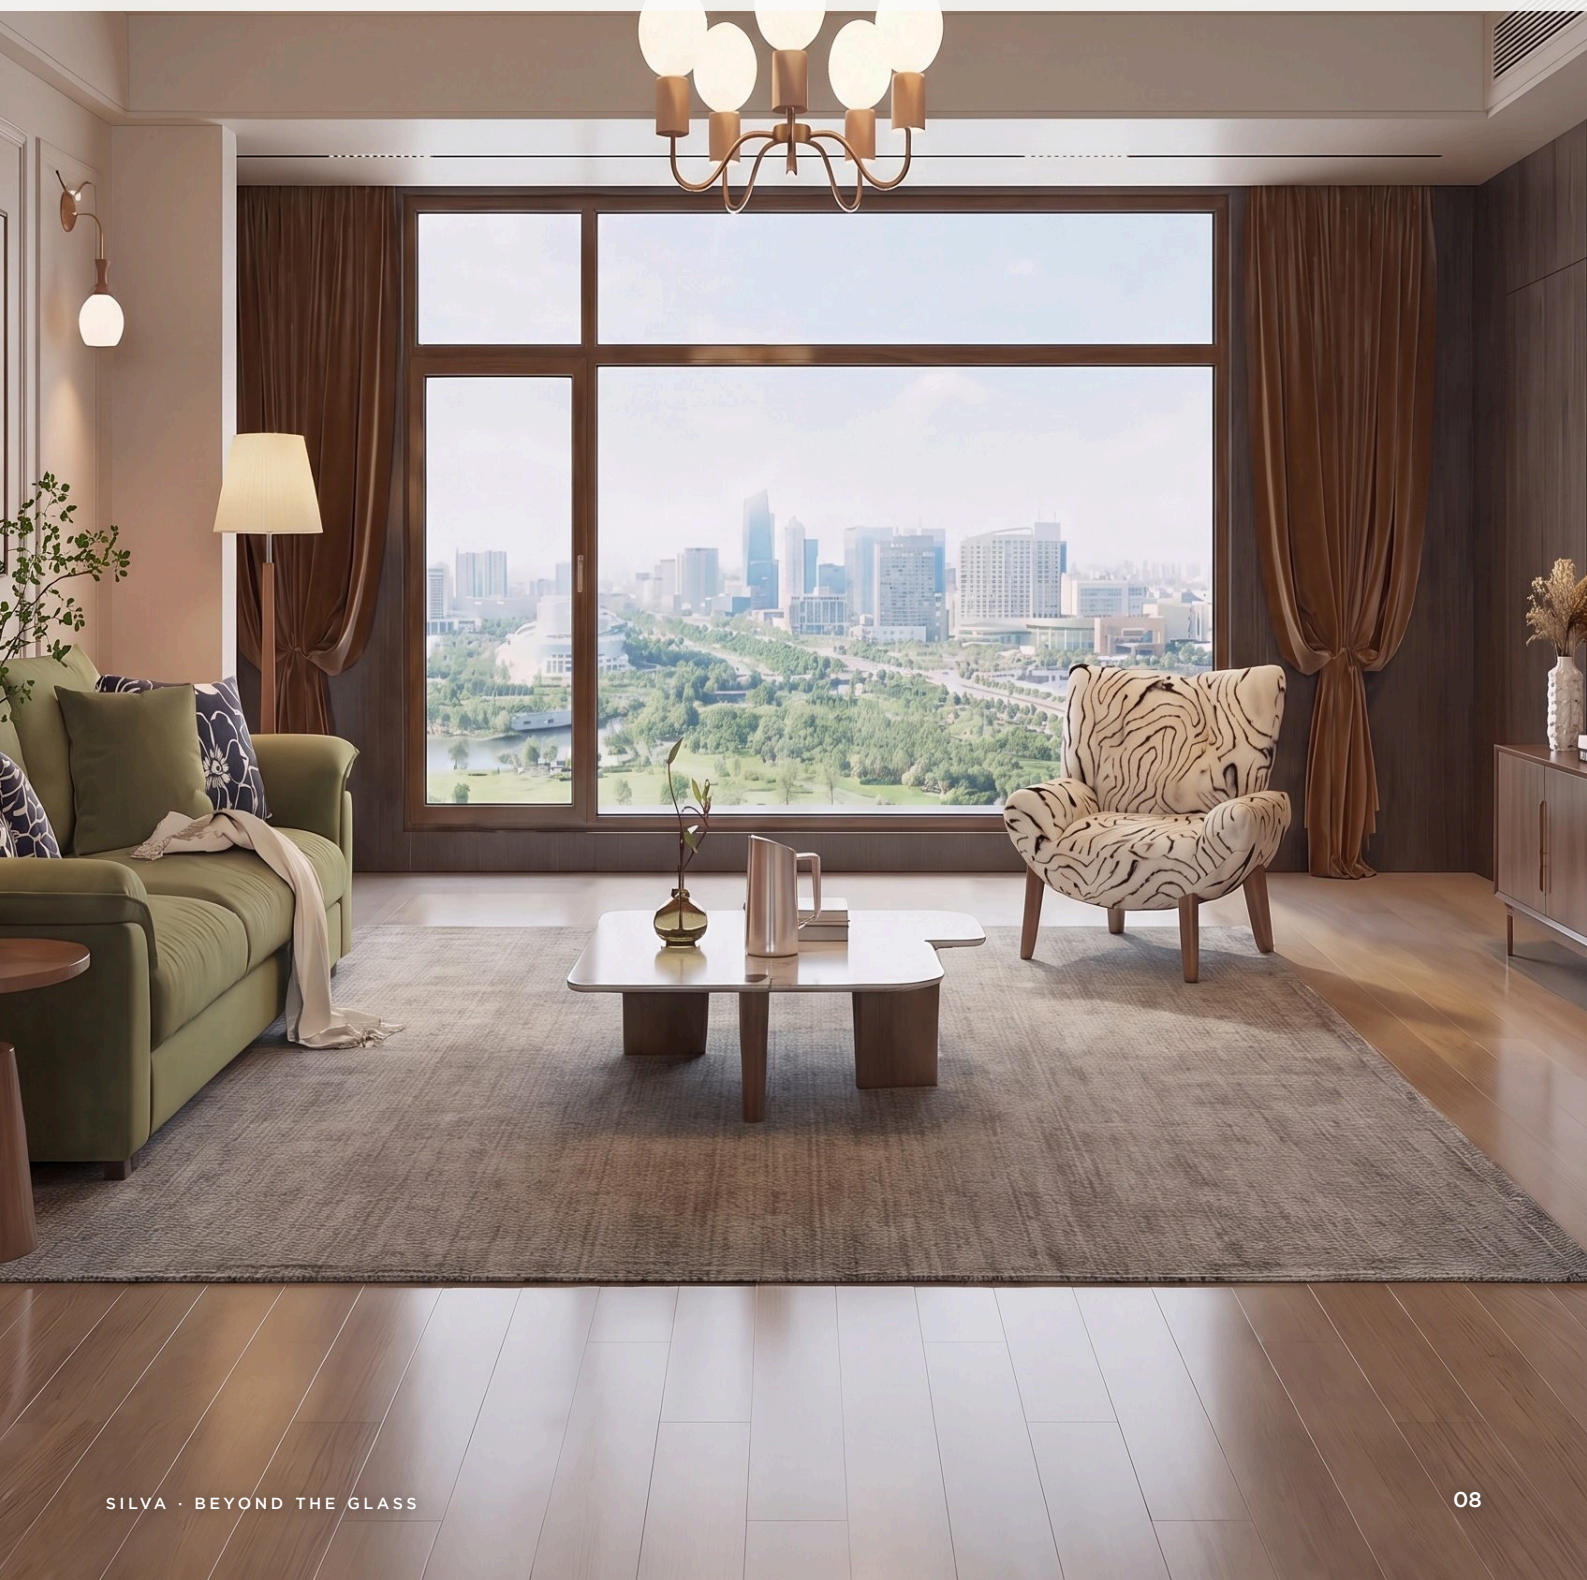

SILVA · TILT & TURN WINDOW

Silva-80

80 MM · DEPTH

The insulation tier: triple glazing as the standard build on an 80 mm section — specified where heat, cold or noise asks for more than two panes.



SOLID OAK
INTERIOR
STANDARD · AS
SUPPLIED

DEPTH OF PROFILE

80 mm

ALUMINUM WALL

≥ 1.4 mm

WOOD INTERIOR

**18 mm hardwood · oak
std**

WOOD OPTIONS

**Chestnut / merbau / teak
/ padauk**

GLAZING

5 + 12Ar + 5 + 12Ar + 5

GLASS RABBET

50.5 / 47 mm

HARDWARE

**HOPPE · MACO, as
supplied**

FINISHES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · CURRENT SPECIES AND FINISH COLORS ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



SILVA · TILT & TURN WINDOW

Silva-85

85 MM · DEPTH

The volume model of the wood range — a full 85 mm section with inward-opening screens in three mesh grades.



SOLID OAK
INTERIOR
STANDARD · AS
SUPPLIED

DEPTH OF PROFILE

85 mm

ALUMINUM WALL

≥ 1.4 mm

WOOD INTERIOR

**18 mm hardwood · oak
std**

WOOD OPTIONS

**Chestnut / merbau / teak
/ padauk**

GLAZING

5 + 20Ar + 5

GLASS RABBET

41.5 / 38 mm

SCREENS

**48-mesh / 304 / 316,
inward**

HARDWARE

**HOPPE · MACO, as
supplied**

FINISHES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · CURRENT SPECIES AND FINISH COLORS ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



SILVA · TILT & TURN WINDOW

Silva-90

90 MM · DEPTH

The heavy sash: a deep wood section — 47 mm frame, 82 mm sash — carrying wide argon-filled glass on German locking hardware.



SOLID OAK
INTERIOR
STANDARD · AS
SUPPLIED

DEPTH OF PROFILE
89 mm

ALUMINUM WALL
≥ 1.5 mm

WOOD FRAME / SASH
47 / 82 mm

WOOD OPTIONS
**Chestnut / merbau / teak
/ padauk**

GLAZING
5 + 27Ar + 5

GLASS RABBET
50 / 45 mm

HARDWARE
**HOPPE · Winkhaus, as
supplied**

FINISHES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · CURRENT SPECIES AND FINISH COLORS ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



SILVA · TILT & TURN WINDOW

Silva-95

95 MM · DEPTH

The flagship tilt & turn: 95 mm deep, triple-glazed as standard, screened inward — the fullest specification in the wood range.



SOLID OAK
INTERIOR
STANDARD · AS
SUPPLIED

DEPTH OF PROFILE

95 mm

ALUMINUM WALL

≥ 1.4 mm

WOOD INTERIOR

18 mm hardwood · oak
std

WOOD OPTIONS

Chestnut / merbau / teak
/ padauk

GLAZING

5 + 12Ar + 5 + 12Ar + 5

GLASS RABBET

50.5 / 47 mm

SCREENS

48-mesh / 304 / 316,
inward

HARDWARE

HOPPE · MACO, as
supplied

FINISHES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · CURRENT SPECIES AND FINISH COLORS ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



SILVA · CASEMENT WINDOW

Silva-75

75 MM · DEPTH

The outward casement in wood-clad form — the Philippine default opening, warmed from the inside.



SOLID OAK
INTERIOR
STANDARD · AS
SUPPLIED

DEPTH OF PROFILE

75 mm

WOOD INTERIOR

18 mm hardwood · oak
std

WOOD OPTIONS

Chestnut / merbau / teak
/ padauk

OPENING

Outward casement

FINISHES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · CURRENT SPECIES AND FINISH COLORS ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



SILVA · CASEMENT WINDOW

Silva-95

95 MM · DEPTH

The large casement: a 95.7 mm section for taller sashes and stronger wind zones.



SOLID OAK
INTERIOR
STANDARD · AS
SUPPLIED

DEPTH OF PROFILE

95.7 mm

WOOD INTERIOR

18 mm hardwood · oak
std

WOOD OPTIONS

Chestnut / merbau / teak
/ padauk

OPENING

Outward casement

FINISHES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · CURRENT SPECIES AND FINISH COLORS ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



SILVA · SLIDING WINDOW

Silva-115

115 MM · DEPTH

The wood-clad slider — a 115 mm double-track section where the warm interior meets a working kitchen or hallway.



SOLID OAK
INTERIOR
STANDARD · AS
SUPPLIED

DEPTH OF PROFILE

115 mm

WOOD INTERIOR

18 mm hardwood · oak
std

WOOD OPTIONS

Chestnut / merbau / teak
/ padauk

OPENING

Sliding

FINISHES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · CURRENT SPECIES AND FINISH COLORS ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



SILVA · SLIDING WINDOW

Silva-165

165 MM · DEPTH

The deep slider: 165 mm of track section for wider glass.



SOLID OAK
INTERIOR
STANDARD · AS
SUPPLIED

DEPTH OF PROFILE

165 mm

WOOD INTERIOR

18 mm hardwood · oak
std

WOOD OPTIONS

Chestnut / merbau / teak
/ padauk

OPENING

Sliding

FINISHES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · CURRENT SPECIES AND FINISH COLORS ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



SILVA · SWING DOOR

Silva-75

75 MM · DEPTH

The compact wood-clad door for balconies and gardens.



SOLID OAK
INTERIOR
STANDARD · AS
SUPPLIED

DEPTH OF PROFILE

75 mm

WOOD INTERIOR

18 mm hardwood · oak
std

WOOD OPTIONS

Chestnut / merbau / teak
/ padauk

OPENING

Outward swing

FINISHES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · CURRENT SPECIES AND FINISH COLORS ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



SILVA · SWING DOOR

Silva-85

85 MM · DEPTH

The main swing door of the wood range — daily-use hardware on an 85 mm section.



SOLID OAK
INTERIOR
STANDARD · AS
SUPPLIED

DEPTH OF PROFILE

85 mm

WOOD INTERIOR

**18 mm hardwood · oak
std**

WOOD OPTIONS

**Chestnut / merbau / teak
/ padauk**

OPENING

Outward swing

FINISHES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · CURRENT SPECIES AND FINISH COLORS ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



SILVA · SWING DOOR

Silva-135

135 MM · DEPTH

The heavy entry: a 135 mm section with screen option, for principal doors.



SOLID OAK
INTERIOR
STANDARD · AS
SUPPLIED

DEPTH OF PROFILE

135 mm

WOOD INTERIOR

18 mm hardwood · oak
std

WOOD OPTIONS

Chestnut / merbau / teak
/ padauk

OPENING

Outward swing

SCREEN

Optional

FINISHES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · CURRENT SPECIES AND FINISH COLORS ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



SILVA · FOLDING DOOR

Silva-90

90 MM · DEPTH

The wall that folds away, in wood — a 91 mm bi-fold section opening a room to a terrace.



SOLID OAK
INTERIOR
STANDARD · AS
SUPPLIED

DEPTH OF PROFILE

91 mm

WOOD INTERIOR

18 mm hardwood · oak
std

WOOD OPTIONS

Chestnut / merbau / teak
/ padauk

OPENING

Bi-fold

FINISHES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · CURRENT SPECIES AND FINISH COLORS ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



SILVA · SLIDING DOOR

Silva-155

155 MM · DEPTH

Large-format sliding with a hardwood interior — a 156 mm section moving full-height glass.



SOLID OAK
INTERIOR
STANDARD · AS
SUPPLIED

DEPTH OF PROFILE

156 mm

WOOD INTERIOR

18 mm hardwood · oak
std

WOOD OPTIONS

Chestnut / merbau / teak
/ padauk

OPENING

Sliding

FINISHES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · CURRENT SPECIES AND FINISH COLORS ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



SILVA · SLIDING DOOR

Silva-220

220 MM · DEPTH

The aspirational end of Silva: a 218 mm multi-track section — the biggest opening the wood range makes.



SOLID OAK
INTERIOR
STANDARD · AS
SUPPLIED

DEPTH OF PROFILE

218 mm

WOOD INTERIOR

18 mm hardwood · oak
std

WOOD OPTIONS

Chestnut / merbau / teak
/ padauk

OPENING

Sliding, multi-track

SCREEN

Optional

FINISHES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · CURRENT SPECIES AND FINISH COLORS ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



How a Silva system gets specified.

We measure the opening, match series, depth, species, glazing and finish to it, and quote after — not before. A wood-clad system adds one decision an aluminum system does not have: the species. That is settled with physical samples in hand, never from a printed page.

Supplied and installed under one responsibility. Most window failures are installation failures; we do not split that accountability.

START WITH ONE OPENING

(0917) 800 0172 · nautilusph.com

[DRAFT — FULL CONTACT DETAILS TO FOLLOW FROM JBC]

Every Silva system, one table.

Sixteen systems, named by series and depth. Any of them can be specified at assessment; the aluminum range follows in Part Two.

SERIES	TYPE	DEPTHS (MM)
Silva	Tilt & turn window	70 • 75 • 80 • 85 • 90 • 95
Silva	Casement window	75 • 95
Silva	Sliding window	115 • 165
Silva	Swing door	75 • 85 • 135
Silva	Sliding door	155 • 220
Silva	Folding door	90

DEPTHS ROUNDED TO 5 MM • EXACT SECTIONS STATED ON EACH PAGE AND AT SPECIFICATION • ALL SPECIFICATIONS ARE THE SYSTEMS AS SUPPLIED BY THE MANUFACTURER

NAUTILUS
BEYOND THE GLASS™

2026

ALUMINUM

Window & Door

SYSTEMS

BEYOND THE GLASS

A JBC UNLTD COMPANY

PART TWO • THE ALUMINUM RANGE

Most window problems are not **glass** problems.

They are frame problems, drainage problems, hardware problems, installation problems. Four aluminum series follow — each engineered as a complete opening system, specified to your site and installed under one responsibility.

MERIDIAN • LINEA • MOTUS • ATRIUM

Inside

04	Meridian · Classic	Tilt & turn · outward · sliding · doors · folding
13	Linea · Slim	Narrow sightlines · concealed hardware
21	Motus · Motorized	Single hung · awning · sliding — the motor is the product
25	Atrium · Sunroom	The structural glass roof
28	Finishes	Powder · fluorocarbon coastal · wood-grain
29	The assessment	How a system gets specified

Model names are series + profile depth in millimeters, rounded to the nearest five; the exact measured depth is printed on each page. The opening type is carried by the chapter. Specifications are the systems as supplied and are confirmed at assessment. No price appears in this book. The companion volume, **Silva · Wood**, covers the wood-clad range — real hardwood inside, aluminum outside.

NAUTILUS
BEYOND THE GLASS™

SERIES 01

Meridian Classic

The main line of the aluminum range — every way a wall can open, engineered on proven sections with named German and Austrian hardware. When in doubt, this is the series a home starts from.

BEYOND THE GLASS

MERIDIAN • CLASSIC

MERIDIAN · CLASSIC

Meridian-70

TILT & TURN WINDOW · 72.5 MM

The entry tilt & turn of the classic range — and already triple-glazed: three panes with double argon cavities as the standard build, with wider thermal breaks sized for extreme weather.

DEPTH OF PROFILE

72.5 mm

SIGHTLINE

89.3 mm

GLAZING

6+16Ar+6+16Ar+6, fixed
& sash

GLASS RABBET

57 mm

HANDLE

German HOPPE, auto-
locking

TRANSMISSION

German G-U

CORNERS

R7 filleted · whole seal
strip

FINISH

Austrian TIGER powder
coat

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS OF ITS RANGE · SECTIONS, GLAZING AND HARDWARE ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



MERIDIAN · CLASSIC

Meridian-90

TILT & TURN WINDOW · 90 MM

The heavy classic: a 90 mm laser-welded section with German WINKHAUS transmission, argon-filled 27 mm cavities and a non-return drainage path that keeps water — and insects — out.

DEPTH OF PROFILE
90 mm

WALL THICKNESS
1.8 mm

GLAZING
5+27Ar+5, fixed & sash

GLASS RABBET
50 mm

TRANSMISSION
German WINKHAUS

HANDLE
**Italian GINKAO · HOPPE
opt.**

PROCESS
**Seamless laser welding ·
foam-filled**

SCREEN
**Optional, semi-
concealed**

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS OF ITS RANGE · SECTIONS, GLAZING AND HARDWARE ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



MERIDIAN · CLASSIC

Meridian-80

OUTWARD WINDOW · 80.5 MM

The Philippine default opening in its classic build — triple-glazed, seam-welded so there is no water path, with hidden drainage and no glazing bead in view.

DEPTH OF PROFILE
80.5 mm

SIGHTLINE
100 mm

GLAZING
6+16Ar+6+16Ar+6

GLASS RABBET
57 mm

HANDLE
German HOPPE, auto-locking

TRANSMISSION
German G-U

DRAINAGE
Hidden

DESIGN
Non-bead sash · R7 corners

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS OF ITS RANGE · SECTIONS, GLAZING AND HARDWARE ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



MERIDIAN · CLASSIC

Meridian-110

OUTWARD WINDOW · 108 MM

The deep outward window: flush sash and frame in one plane, argon-filled double glazing, and an integrally welded glazing bead — specified where wind load asks for more section.

DEPTH OF PROFILE
108 mm

GLAZING
5+27Ar+5

GLASS RABBET
50 mm

DESIGN
Flush — sash level with frame

SCREEN
48-mesh / 304 stainless, inward

DRAINAGE
Non-return system

PROCESS
Seamless welding · foam-filled

FINISH
Austrian TIGER powder coat

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS OF ITS RANGE · SECTIONS, GLAZING AND HARDWARE ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



MERIDIAN · CLASSIC

Meridian-140

SLIDING WINDOW · 138 MM

The triple-track slider of the classic range — three sashes riding a 138 mm section, with a stainless screen track built in and a German HOPPE handle on the screen itself.

DEPTH OF PROFILE
138 mm

FRAME SIGHTLINE
32.4 mm

SCREEN
**304 stainless steel,
integrated**

SCREEN HANDLE
German HOPPE

PROCESS
Seamless welding

TRACK
**Bottom cavity foam-
filled**

DETAIL
**Drain holes · rubber
bumpers**

SAFETY
Lock seat + lock point

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS OF ITS RANGE · SECTIONS, GLAZING AND HARDWARE ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



MERIDIAN · CLASSIC

Meridian-70

OUTWARD DOOR · 70 MM

The classic outward door for balconies and gardens:
German G-U latch and lock seat, a circular indoor
lock, and a key cylinder for locking from outside —
the daily-use door, done properly.

DEPTH OF PROFILE
70 mm

SIGHTLINE
126 mm

GLAZING
5+20Ar+5, fixed & sash

GLASS RABBET
38 mm

LATCH & LOCK SEAT
German G-U

HINGE
**German Dr. Hahn, heavy
sash**

PROCESS
**Seamless welding · foam-
filled**

FINISH
**Austrian TIGER powder
coat**

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS OF ITS RANGE · SECTIONS, GLAZING AND HARDWARE ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



MERIDIAN · CLASSIC

Meridian-190

SLIDING DOOR · 191 MM

The triple-track sliding door: two glass sashes and an anti-mosquito screen sash on a 191 mm section, each sash with its own lock seat, moving a wall of glass aside.

DEPTH OF PROFILE
191 mm

FRAME SIGHTLINE
40 mm

GLAZING
6+20Ar+6

GLASS RABBET
38 mm

SCREEN
304 stainless, own track

LOCKING
**Independent lock point
per sash**

WALL THICKNESS
2.0 mm main parts

FINISH
**Austrian TIGER powder
coat**

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS OF ITS RANGE · SECTIONS, GLAZING AND HARDWARE ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



MERIDIAN · CLASSIC

Meridian-80

FOLDING DOOR · 78 MM

The wall that folds away: sashes stack tight on dual metal tracks with high-strength pulleys, KERSENBERG hardware throughout, and a raised waterproof sill holding the weather at the line.

DEPTH OF PROFILE
78 mm

SIGHTLINE
75 mm

GLAZING
5+15Ar+5

GLASS RABBET
34 mm

HARDWARE
KERSENBERG system

OPENING
**Press-to-open,
handle+lock in one**

TRACKS
**Dual metal · high-
strength pulleys**

SILL
Waterproof, raised

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS OF ITS RANGE · SECTIONS, GLAZING AND HARDWARE ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



NAUTILUS
BEYOND THE GLASS™



SERIES 02

Linea Slim

Designed to disappear. Linea narrows every sightline — concealed handles, flush sashes, frames that step back — so the architecture keeps the view and the aluminum keeps the weather.

BEYOND THE GLASS

LINEA • SLIM

LINEA · SLIM

Linea-80

TILT & TURN WINDOW · 80 MM

DEPTH OF PROFILE
80 mm

SIGHTLINE
91 mm

HANDLE
German HOPPE

TRANSMISSION
Austrian MACO

GLAZING
5+27Ar+5, fixed & sash

GLASS RABBET
50 mm

WALL THICKNESS
1.8 mm

OPTION
Built-in louver glass

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS OF ITS RANGE · SECTIONS, GLAZING AND HARDWARE ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT

The slim tilt & turn: Austrian MACO transmission and lock bracket under a German HOPPE handle, argon-filled 27 mm cavities — with a built-in louver-glass option, manual or electric.



LINEA · SLIM

Linea-115

TILT & TURN WINDOW · 115 MM

The deep slim section, flush inside: sash and frame in one plane with no protrusions, multi-lock seats, EPDM sealing — the tilt & turn for tall condo glass.

DEPTH OF PROFILE
115 mm

SIGHTLINE
91 mm

GLAZING
5+27Ar+5

GLASS RABBET
50 mm

HANDLE
German HOPPE, auto-locking

TRANSMISSION
Austrian MACO

DESIGN
Flush · multi-lock · EPDM

SCREEN
48-mesh, high transmittance

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS OF ITS RANGE · SECTIONS, GLAZING AND HARDWARE ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



LINEA · SLIM

Linea-115

OUTWARD WINDOW · 115 MM

The outward window with nothing in the hand's way: a concealed folding handle, flat-panel sash flush with the frame, and non-return drainage keeping the line clean.

DEPTH OF PROFILE
115 mm

SIGHTLINE
99 mm

GLAZING
5+20Ar+5

HANDLE
Concealed, folding

DESIGN
Flat-panel, flush

SCREEN
304 stainless, optional

DRAINAGE
Non-return system

WALL THICKNESS
1.8 mm

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS OF ITS RANGE · SECTIONS, GLAZING AND HARDWARE ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



LINEA · SLIM

Linea-115 Slim

OUTWARD WINDOW · 115 MM · 79 MM SIGHTLINE

The same 115 mm system, narrowed: a 79 mm sightline — twenty millimeters less aluminum in view — with an ultra-narrow inward screen and the concealed folding handle.

DEPTH OF PROFILE
115 mm

SIGHTLINE
79 mm

GLAZING
5+20Ar+5

HANDLE
Concealed, folding

SCREEN
Ultra-narrow, 48-mesh / steel

DESIGN
Flush, seamless-welded

DRAINAGE
Non-return system

DISTINCTION
The narrowest outward sightline

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS OF ITS RANGE · SECTIONS, GLAZING AND HARDWARE ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



LINEA · SLIM

Linea-70

OUTWARD DOOR · 70 MM

The slim outward door: ultra-narrow frame, seam-welded and foam-filled through frame and sash, argon glazing — and over one hundred finish colors at the order.

DEPTH OF PROFILE
70 mm

SIGHTLINE
89 mm

GLAZING
5+20Ar+5, fixed & sash

GLASS RABBET
40 / 37 mm

HANDLE
German HOPPE

TRANSMISSION
German G-U

ALLOY
6063-T5 · ≥ 1.8 mm

COLORS
100+ custom finishes

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS OF ITS RANGE · SECTIONS, GLAZING AND HARDWARE ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



LINEA · SLIM

Linea-140

SLIDING DOOR · 140 MM

The embedded slider: the frame recesses fully into the wall so only glass shows, on running gear rated to a thousand kilograms per leaf — built for the largest openings.

DEPTH OF PROFILE
140 mm

FRAME
Fully recessed — hidden

LOAD RATING
1,000 kg per leaf

GLAZING
5+27Ar+5

GLASS RABBET
45 mm

STRUCTURE
Reinforced central post

WALL THICKNESS
≥ 2.0 mm

DRAINAGE
Non-return system

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS OF ITS RANGE · SECTIONS, GLAZING AND HARDWARE ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



LINEA · SLIM

Linea-215

SLIDING DOOR · 215 MM

The triple-track flagship of the slim range: three sashes on a 215 mm section with KERSENBERG hardware end to end, brush seals, track drainage and no glazing bead in view.

DEPTH OF PROFILE
215 mm

FRAME SIGHTLINE
70 mm

GLAZING
6+20Ar+6

GLASS RABBET
36 mm

HARDWARE
**KERSENBERG, incl.
screen**

SCREEN
26-mesh, third track

SEAL
Brush · track drainage

DESIGN
**Non-bead, maximum
glass**

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS OF ITS RANGE · SECTIONS, GLAZING AND HARDWARE ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



NAUTILUS
BEYOND THE GLASS™

SERIES 03

Motus Motorized

Three systems where the motor is the product: a lifting window, an awning that closes itself in the rain, and a sliding door that moves glass a person cannot. The machine does the opening — the household just decides.

BEYOND THE GLASS

MOTUS · MOTORIZED

MOTUS · MOTORIZED

Motus-210

MOTORIZED SLIDING DOOR · 210 MM

The door that moves glass a person cannot: sashes ride double tracks on an obstacle-free sill — no threshold at all — and hide their frames inside the door frame when pushed aside. The drive closes it on the rain sensor's word.

DEPTH OF PROFILE
210 mm

FRAME SIGHTLINE
32.3 mm

MAIN PARTS WALL
2.5 mm

GLAZING
6 + 20Ar + 6, fixed & sash

GLASS RABBET
38 mm

DRIVE
Motorized · rain & wind sensor

INTERFACES
Smart home · app · touch

FINISH
Austrian TIGER powder coat

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · DRIVES, SENSORS AND INTERFACES ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



MOTUS · MOTORIZED

Motus Single Hung

MOTORIZED LIFTING WINDOW

A fixed lower pane with an intelligent lifting sash — the picture-window wall that still ventilates. Sized from a standard opening to an eight-meter run, with the screen already integrated.

WIDTH RANGE

0.8 – 8.0 m

HEIGHT RANGE

1.0 – 2.7 m

CROSS-SECTION

155 – 380 mm

SCREEN

28-mesh, integrated

STANDARD

Rain sensor · touch · panel

OPTIONAL

Wind sensor · security · app

SAFETY

Anti-fall · e-stop · child lock

MOTOR

Silent · below safe voltage

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · DRIVES, SENSORS AND INTERFACES ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



MOTUS · MOTORIZED

Motus Awning

MOTORIZED AWNING WINDOW · THREE BUILDS

The top-hung sash that leans out over the weather — and closes itself when rain begins. Three builds carry the same intelligence from a standard opening up to an eight-meter span, with concealed drainage and no glazing bead in view.

BUILDS

190 / 260 / 320 mm
section

WIDTH RANGE

0.8 – 8.0 m by build

HEIGHT RANGE

0.6 – 2.0 m by build

GLAZING

6+27Ar+6 to 12+27Ar+12

STANDARD

Rain sensor · auto-close

OPTIONAL

Electric sunshade

SAFETY

Anti-fall · e-stop · child
lock

CONTROL

App · touch ·
manual/auto

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · DRIVES, SENSORS AND INTERFACES ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT

THE TWO WIDER BUILDS ADD A CENTRAL ARMREST RAIL · FIXED LOWER GLASS ON ALL THREE



NAUTILUS
BEYOND THE GLASS

SERIES 04

Atrium Sunroom

A room made of sky. Atrium is the structural glass roof of the range — a high-strength aluminum frame that turns a terrace, a garden edge or a rooftop into the most-used room in the house.

BEYOND THE GLASS

ATRIUM • SUNROOM

ATRIUM · SUNROOM

Atrium-130

STRUCTURAL SUNROOM SYSTEM

One system, engineered to be shaped: the load-bearing members are high-precision aluminum profile, cut to length and assembled on your site — so the roof is designed to the space instead of the space to the roof. Ambient LED can be built into the frame itself.

STRUCTURE

High-strength aluminum alloy

LIGHTING

Optional LED, frame & drain line

MEMBER WALL

1.0 – 3.0 mm by component

INSULATION

Optional foam-filled profiles

ASSEMBLY

Cut to length · installed on site

GLAZING

Specified per roof at assessment

CORNERS

Integral welding · whole-sprayed

FORM

Designed to the site

SCENES SHOWN ARE THE MANUFACTURER'S DEPICTIONS · STRUCTURE, GLAZING AND FINISH ARE CONFIRMED AGAINST THE MANUFACTURER'S OFFERING AT ASSESSMENT



A structure first. A room second.

A sunroom lives or dies on its structure — strength overhead, water management everywhere. Atrium is engineered as a kit of high-strength aluminum members, which is what makes it buildable to your site's exact shape.

01

Cut on site, not in a factory queue

The bearing members are high-precision aluminum profile that is cut to length and installed at the site — no complex production tooling, and no risk of a roof built to the wrong measurement.

02

One welded, one-sprayed shell

Frame members are integrally welded and integrally sprayed, so the finish carries no joints for weather to find. Profiles can optionally be foam-filled for thermal and acoustic damping.

03

Light built into the structure

The profile and the drainage line can carry built-in LED ambient lighting — the room glows from its own frame after dark, with no visible fixtures.

04

Drainage as a design member

The drain sink is an engineered part of the frame, not an afterthought — rain is collected and carried inside the structure's own lines.

AS SUPPLIED

Load-bearing members: high-strength aluminum alloy, 1.0–3.0 mm wall by component ·
Integral welding and integral spraying · Optional LED lighting and foam filling · Glazing and roof form specified per site at assessment

The surface is a specification too.

Every finish in this book is the manufacturer's own verified offering — nothing is shown that cannot be ordered. Physical samples decide the final call at assessment; no color is promised from a printed page.

01

Powder coat, standard

Austrian TIGER powder spraying across the range — the manufacturer's standard finish, in a wide chart of solid colors. More than one hundred custom colors can be ordered.

02

Fluorocarbon, coastal

An optional weathering-resistant fluorocarbon powder with 10 / 15 / 20-year grades — the manufacturer's own recommendation for coastal and high-UV sites. We specify it for salt air.

03

Wood-grain finish

A printed wood-grain effect on pure aluminum — no wood in the build. The warmth of timber where the budget or the exposure argues against the real thing.

04

Real wood: Silva

When only real wood will do, the companion Silva book covers the wood-clad range — solid oak interiors on the same engineered aluminum shell.

TRUTH IN MATERIALS

Wood-grain finish is printed on aluminum — it contains no wood. The Silva range is real 18 mm hardwood applied to the interior side. We will always tell you which one you are looking at.

How a system gets specified.

We measure the opening, match series, depth, glazing, hardware and finish to it, and quote after — not before. Wind zone, sun path, salt air and sound all change the answer, which is why the honest one starts on site.

Supplied and installed under one responsibility. Most window failures are installation failures; we do not split that accountability.

START WITH ONE OPENING

(0917) 800 0172 · nautilusph.com

[DRAFT — FULL CONTACT DETAILS TO FOLLOW FROM JBC]

NAUTILUS

BEYOND THE GLASS TM

W I N D O W • D O O R • S U N R O O M

BEYOND THE GLASS • A JBC UNLTD COMPANY